

PIPE REPAIR CLAMPS

ALL STAINLESS SINGLE PANEL

PANEL & LIFTER BAR: Type 304 (18-8) Stainless Steel per ASTM A240.

GASKET: SBR Chek-O-Seal with multi o-ring sealing ribs from 100% new rubber to ensure performance under varying pressures with superior storage characteristics. Suitable for mild acids, water and salt media with a temperature range of -40° F to +150° F. Other materials available.

ARMOR PLATE: Type 304 (18-8) Stainless Steel per ASTM A240, recessed and bonded to the gasket.

BOLTS & NUTS: Type 304 (18-8) Stainless Steel per ASTM A193 and A194. NOTE: Hex nuts are furnished with fusion bonded coating to prevent seizing and galling.

WASHERS: Delrin per MIL-A50424.

LUGS: Type 304 (18-8) Stainless Steel per ASTM A240.

Sizes: 1-1/4" – 12"



ALL STAINLESS DOUBLE PANEL

PANEL & LIFTER BAR: Type 304 (18-8) Stainless Steel per ASTM A240.

GASKET: SBR Chek-O-Seal with multi o-ring sealing ribs from 100% new rubber to ensure performance under varying pressures with superior storage characteristics. Suitable for mild acids, water and salt media with a temperature range of -40° F to +150° F. Other materials available.


ARMOR PLATE: Type 304 (18-8) Stainless Steel per ASTM A240, recessed and bonded to the gasket.

BOLTS & NUTS: Type 304 (18-8) Stainless Steel per ASTM A193 and A194. NOTE: Hex nuts are furnished with fusion bonded coating to prevent seizing and galling.

WASHERS: Delrin per MIL-A50424.

LUGS: Type 304 (18-8) Stainless Steel per ASTM A240.

Sizes: 3" – 22"

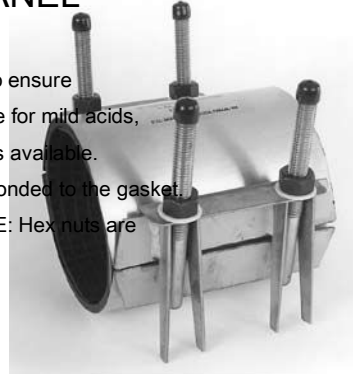

ALL STAINLESS TRIPLE PANEL

PANEL & LIFTER BAR: Type 304 (18-8) Stainless Steel per ASTM A240.

GASKET: SBR Chek-O-Seal with multi o-ring sealing ribs from 100% new rubber to ensure performance under varying pressures with superior storage characteristics. Suitable for mild acids, water and salt media with a temperature range of -40° F to +150° F. Other materials available.

ARMOR PLATE: Type 304 (18-8) Stainless Steel per ASTM A240, recessed and bonded to the gasket.

BOLTS & NUTS: Type 304 (18-8) Stainless Steel per ASTM A193 and A194. NOTE: Hex nuts are furnished with fusion bonded coating to prevent seizing and galling.

WASHERS: Delrin per MIL-A50424.

LUGS: Type 304 (18-8) Stainless Steel per ASTM A240.

Size: 10" – 48"

